


# LED Striped Light Bars

24V 3000K CRI 85 Series



CLEANLIFE® LED

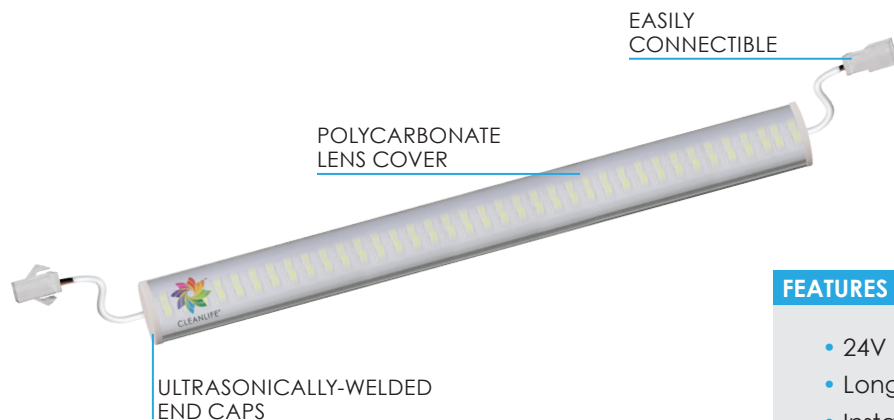

CLEANLIFE® LED Light Bars are a one-of-a-kind lighting solution for backlit mirrors, signs, retail displays, decorative, under cabinet and cove lighting.

## FEATURES

- 24V Constant Current Design
- Long Lifetime, L70>50,000 Hours
- Instant On, No Flicker, Mercury Free, No UV
- High Efficacy, Up to 100 LPW
- Glare Free, Polycarbonate Lens Cover
- Glass free for safer working conditions
- Available in all standard T5 lengths as well as custom lengths, No MOQ Required
- Daisy Chains with Quick Connectors
- Operating Temperature from -13°F to +122°F
- Exceptional Color Accuracy, CRI 85
- CRI 95 and 2700K available for custom orders
- 7-Year Manufacturer's Limited Warranty
- UL Recognized Component, CE and RoHS Compliant



7-Year Limited Warranty

\*Dimmable with compatible 24V constant voltage dimmable LED drivers only. Speak to a CLEANLIFE® representative for more information.

## APPLICATION INFORMATION

### Applications

- Indoor
- Accent Lighting
- Signage
- Under Cabinet
- Enclosed Locations
- Backlit Mirrors

### Market Segments

- All

## SPECIFICATIONS

Dimensions	See Table
Beam Angle	>180°
Operating Temp.	-13°F~+122°F
Efficacy	100 LPW
Application	Indoor
Power Supply	24V Constant Voltage
Warranty	7-year Manufacturer's Limited

## Color Temperature



3000K



Vapor Tight



EzConnect



Energy Saving



Robust Design



CLEANLIFE® LED



Project/Job	Notes
Date	
Comments	
Prepared by	


Ordering Information

Part Number	Length (IN)	Power (W)	Input Voltage (V)	Average Rated Life (hrs.)	CCT (±175)	Typical Lumens (lm) (+10%)	CRI (±5)	Lumens Per Watt
CL-CTS24SS02HW02JW-22N (85 CRI)	22	6	24V DC	L70>50,000	3045K	600	85	100
CL-CTS24SS02HW02JW-34N (85 CRI)	34	8	24V DC	L70>50,000	3045K	800	85	100
CL-CTS24SS02HW02JW-46N (85 CRI)	46	12	24V DC	L70>50,000	3045K	1200	85	100
CL-CTS24SS02HW02JW-58N (85 CRI)	58	15	24V DC	L70>50,000	3045K	1500	85	100

Light Bar Dimensions

Part Number	(A) Length (in.)
CL-CTS24SS02HW02JW-22N (85 CRI)	21.5
CL-CTS24SS02HW02JW-34N (85 CRI)	33.25
CL-CTS24SS02HW02JW-46N (85 CRI)	45.5
CL-CTS24SS02HW02JW-58N (85 CRI)	57.5

**CLEANLIFE® EzConnect™ System**  
Important Connector Designations



**CLEANLIFE® ENERGY LLC**  
1-800-316-2532  
support@cleanlifeled.com  
www.cleanlifeled.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of CLEANLIFE® ENERGY LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.



CLEANLIFE® LED